



GB04/2455



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 13 SEP 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

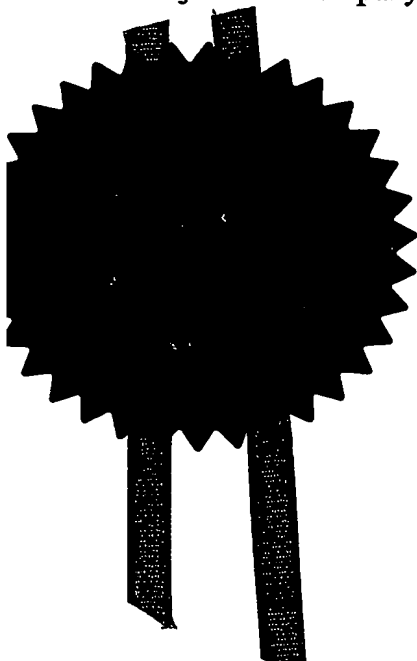

Signed

A. S. Jones

Dated 17 August 2004

Patents Form 1/77

Patent Act 1977
(Rule 1)



14AUG03 EB30065-1 000022
P01/7700 0.00-0319019.6



Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

KL/SS/38238

2. Patent application number

(The Patent Office will fill in this part)

0319019.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Donald Scot Thom
74 Woodcote Road
Caversham
Reading
Berkshire RG4 7EX

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

3380748002

4. Title of the invention

Floating Dry Dock System

5. Name of your agent (if you have one)

fJ Cleveland

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

40-43 Chancery Lane
London
WC2A 1JQ

Patents ADP number (if you know it)

07368855001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s) 2

Abstract

Drawing(s) 3+3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application

Signature *fj Cleveland* Date *12/8/07*
fJ Cleveland

12. Name and daytime telephone number of person to contact in the United Kingdom

Keith Leaman 0118 902 6932

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first get written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 5005
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Floating Dry Dock System

5 This invention relates to dry dock systems for use in lifting vessels out of the water for maintenance or repair purposes. Typically these types of docks can lift anything from one to several hundred tonnes.

10 There are basically two types of dry dock. There are those comprising a lock that has at least one closable door into which the vessel is floated, and the water is drained from the lock to leave the vessel high and dry.

15 A second type of dry dock system comprises floating docks that consist of a raft that is floated to a region ahead or astern of the vessel and submerged so as to be positioned beneath the vessel. The raft has floatation chambers built into the walls of the raft so that they can be purged of water by displacing the water with compressed air. A major problem with this type of dock is that the amount of required "water plane" makes these types of docks highly unstable. "Water plane" is defined as the area of water at the water air interface which is displaced by a part of the dock. In general the greater the "water plane" the greater will be the stability of the dock. As these docks lift a boat out of the water, there is considerable "water plane" provided by the engagement of the boat hull with the water, but it becomes particularly dangerous as the "water plane" decreases when the hull is lifted out of the water and eventually loses contact with the water. As

20

the boat leaves the water this adds considerable weight to the dock with a considerable and rapid decrease in the "water plane" making the whole system extremely unstable, in the final stages of the lifting operation.

5 To remain within the bounds of stability, it is traditional to design the dock system so that it lifts vessels of about one half of the weight of the dock itself.

There is a need to provide dry dock facilities for small boats at local harbours, moorings, club harbours or lagoons and the like. There is also a need for
10 providing a much cheaper design of floating dock than has been possible before and one that is easily moveable from one location to another. There is also a need to be able to produce a dry dock system that can be used to lift vessels out of the water rapidly thus saving valuable time and cost. Conventional dry dock systems do not permit the rapid lifting of vessels because of the problems due to the
15 unstable designs associated with the "water plane" problem mentioned above.

An object of the present invention is to provide a floating dry dock that is both stable and quick to operate and which can lift vessels of up to twice its own weight.

20

According to the present invention there is provided a dry dock comprising a lifting cradle having two spaced arms pivotally mounted on a base, one or more floatation tanks interconnecting the arms, and a platform mounted on the arms,

and platform support means operable to ensure that the platform remains horizontal when the arms pivot about their pivotal attachment to the base.

5 Preferably the platform has wheels at an extremity of the platform and the platform support means comprises an arcuate track on each arm along which the wheels of the platform run when the arms are pivoted whilst maintaining the platform in a horizontal altitude.

10 Preferably the arms are of an arcuate shape and there are a plurality of elongate floatation tanks extending between the arms to define a part cylindrical cradle.

The base may be a floatable structure or it may have a fixed non-floatable base such as a harbour wall.

15 Where the base is a floatable structure it may comprise one or more elongate hulls.

The base may comprise further two sidewalls at each end of the hulls and the pivot about which the arms rotate may be located on an axis between the hulls.

20 The dry dock may comprise a single floatable cradle or may comprise two floatable cradles.

In a further aspect of the invention the platform may be pivotally mounted between the arms, and the platform support means may comprise pairs of extendable and contractable links, one of each pair of links being operable to expand when the other link of the pair contracts, and the links are operable to ensure that the platform remains horizontal relative to its axis of pivotal mounting on the arms.

The invention will now be described by way of example with reference to the accompanying drawings in which;

Figure 1 is a schematic side view of a dry dock constructed in accordance with the present invention having two lifting cradles, and

Figure 2 is a side view of a second embodiment of the present invention showing a dry dock constructed in accordance with the present invention having a single cradle mounted on a harbour wall,

Figure 3 shows a part-sectional view through a wheel and track of one of the arms of the dry dock shown in Figure 1, and

Figure 4 is a side view of a third embodiment of the present invention.

Referring to Figure 1, there is shown a dry dock 10 that has two lifting cradles 11 mounted on a common base 12. However, it is to be understood that the present invention is applicable to dry docks 10 where there is only one lifting cradle mounted on the base 12. In the following description only one of the lifting cradles 11 will be described but it is to be understood that the other lifting cradle 11 is of an identical, or similar construction.

Referring specifically to Figure 1, the base 12 is in the form of an elongate twin-hull catamaran made of lightweight marine alloy or steel. The base 12 could be a mono-hull or a cylindrical float or other floatable structure.

Mounted on the base 12 are all the controls and services 13 for piloting the base 12 to a location adjacent of vessel 14 to be lifted. The services 13 include pumps for flooding and emptying buoyancy tanks of the lifting cradles (to be described hereinafter) and other services.

Each lifting cradle comprises two arms 15 pivotally mounted on pivotal mountings 17 in sidewalls of the base 11 on pivots located on an axis between the two hulls of the catamaran. The arms 15 are made of a lightweight marine alloy or steel construction. The arms 15 are of an arcuate shape and have elongate buoyancy tanks 16 to 20 (shown dotted) extending between the two arms 15 to define a part-cylindrical cradle 11, which when lowered (as will be explained later), enables the vessels 14 to be floated in from one end of the cradle.

The tanks 16 to 20 have means for selectively flooding the tanks 16 to 20 with water to cause the cradle 11 to submerge and cause the arms 15 to pivot and become submerged. The tanks are connected to a source 24 of compressed air
5 whereby they can be purged of water and filled with compressed air to vary the buoyancy of the cradle 11.

The arms 15 have a platform support means in the form of an arcuate track 26 running along adjacent to the concave edge of the arms 15 for supporting a lifting
10 platform 22.

The lifting platform 22 has wheels 25 at each lateral extremity (see Figure 3) that run in the tracks 26. The shape of the arcuate tracks 26, and the position of the wheels 25, are arranged so that the platform 22 remains stable and horizontal as
15 the arms 15 rotate about the pivotal means 17. As the arms 15 pivot upwards and downwards, the platform 22, whilst remaining horizontal moves in a horizontal direction towards or away from the base 12.

In order to stabilise the vessel 14 during lifting or lowering of the arms 15, the
20 platform 22 is provided with supports 27 that are initially spaced apart and secured to the platform 22 at a width slightly wider than the width of the vessel 14. The supports 27 can be of a height that enables them to project out of the water (as shown on the left hand side of Figure 1) so that the pilot can steer the vessel 14

into position between the supports 27 when the cradle 11 is submerged. The supports 27 are positioned at equal distance from a plane of symmetry of the platform 22 so that the vessel 14 is located above the centre of gravity of the platform 22 to avoid tilting of the platform during lifting or lowering of the arms 15.

In operation, the dry dock 10 is floated out to where the vessel 14 to be lifted is located, or the vessel 14 is floated to the vicinity of the dry dock 10. The dry dock is positioned either astern or ahead of vessel 14. The tanks 16 to 20 of the cradle 11 are flooded with water to submerge the platform 22 to a position where the vessel 14 can be floated into position between the supports 27 from one end of the cradle 11. This position is shown in the left hand side of Figure 1.

With the vessel 14 in place above the platform 22, the tanks 16 to 20 are sequentially purged of water by pumping in compressed air to increase the buoyancy of the cradle 11 in a controlled manner. Firstly, tank 16 is supplied with compressed air then tank 17 followed in sequence by the tanks 18, 19, 20. This causes the arms 15 to rise by pivoting about the pivotal connection 17. The upward movement of the arms 15 from a submerged position as shown in the left hand side of Figure 1 towards the position shown in the right hand side of Figure 1 is continued until the vessel 14 is lifted clear of the water surface 28.

In order to lower the vessel after repair and maintenance from the position shown in the right hand side of Figure 1, the above procedure is reversed. That is to say the tanks 16 to 20 are flooded with water in the reverse order, starting first with tank 20 and then progressing in sequence by flooding tanks 19, 18, 17 and then finally tank 16.

During lifting and lowering of the vessel 14 the combined "water plane" (that is to say the area at the interface between the water surface and the air) of the vessel 14, the catamaran 12, the arms 15, and the tanks 16 to 20 remains reasonably constant and hence the whole of the dry dock 10 together with the vessel is very stable.

The stability of the dry dock 10 is such that it is possible to reverse the traditional factor of safety of 2:1 (that is to say the conventional limit of lifting one half of the displacement of the dry dock 10). Thus with each dry dock 10 constructed in accordance with the present invention it is possible to lift twice the weight of the dry dock. This offers a significant advantage over all prior known floating dry docks.

Furthermore, each of the two cradles shown in Figure 1 can be operated independently of the other. In other words, it is unnecessary to counterbalance the lifting. In fact, the provision of two cradles 11 on one catamaran 12, improves stability of each, because the total "water plane" is the sum total of the "water plane" of both cradles 11, the base 12 and the vessel 14 and not just the "water

plane" of one cradle. In situations with floating dry docks 10 that have two lifting cradles, where one cradle 11 is raised and the other lowered as shown in Figure 1, the raised cradle 11 effectively converts the catamaran base 12 into a trimaran with an outer rigger formed by the raised cradle 11. Therefore, since each cradle 11 is very stable to start with (compared with prior known dry docks) the stability of the whole is further enhanced with two lifting cradles 11.

In Figure 1 there is shown two cradles 11, but as explained above, it is not essential to build two cradles on each base 12.

Furthermore, as shown in Figure 2 the base 12 need not be mounted on a floating pontoon or catamaran. Instead, a single cradle 11 may be mounted on a fixed base 12 such as on a harbour wall 30. In this instance, the arms 15 are mounted on pivotal mountings 17 on the harbour wall 30. Here again, the "water plane" of the cradle 11 together with the vessel 14 ensures high stability at all times when raising or lowering the vessel from the water in exactly the same way as described above.

In the above examples the platform 22 has wheels 25 that run in arcuate tracks 26.

Whilst this is the preferred way of mounting the platform 22 it is possible to mount the platform 22 on pivots 31 at each end of its axis of symmetry instead of mounting them in the arcuate tracks. This is shown schematically in Figure 4.

Referring to Figure 4 the arms 15 need not be of an arcuate shape and the cradle 11 may simply comprise the two arms 15 interconnected by a single buoyancy tank 34 provided at the free ends and interconnecting the two arms 15.

5 In order to maintain the platform 22 in a horizontal and stable state the corners of the platform 22 are interconnected to each of the arms by way of a platform support means in the form of two links 36, 37. The links 36, 37 may be in the form of hydraulic pistons that are interlinked so that the links 36 expand whilst the links 37 contract when the arm 55 is raised by introducing compressed air into the
10 tank 34. During lowering of the cradle 11 the tank 34 is flooded in a controlled manner and the links 37 expand whilst the links 36 contract thereby ensuring that the platform 22 remains horizontal throughout all movements of the arms 15. In this case, the centre of gravity of the platform 22 remains at a fixed radius relative to the pivot about which the arms 15 rotate.

Claims

1. A dry dock comprising a lifting cradle having two spaced arms pivotally mounted on a base, one or more floatation tanks interconnecting the arms, and a platform mounted on the arms, and platform support means operable to ensure that the platform remains horizontal when the arms pivot about their pivotal attachment to the base.
2. A dry dock according to Claim 1, wherein the platform has wheels at an extremity of the platform and the platform support means comprises an arcuate track on each arm along which the wheels of the platform run when the arms are pivoted whilst maintaining the platform in a horizontal altitude.
3. A dry dock according to any one of Claims 1 to 3 wherein the arms are of an arcuate shape and there are a plurality of elongate floatation tanks extending between the arms to define a part cylindrical cradle.
4. A dry dock according to any one of the preceding claims wherein the base is a floatable structure.
5. A dry dock according to Claim 4 wherein the base comprises on or more elongate hulls.

6. A dry dock according to Claim 5 wherein the base comprises two sidewalls at each end of the hulls and the pivot about which the arms rotate is located on an axis between the hulls.

5 7. A dry dock according to any one of Claims 1 to 3 wherein the base is a fixed non-floatable base.

8. A dry dock according to any one of the preceding claims comprising two floatable cradles.

10

9. A dry dock according to Claim 1 wherein the platform is pivotally mounted between the arms and the platform support means comprises pairs of extendable and contractable links, one of each pair of links being operable to expand when the other link of the pair contracts and the links being operable

15

to ensure that the platform remains horizontal relative to its axis of pivotal mounting on the arms.

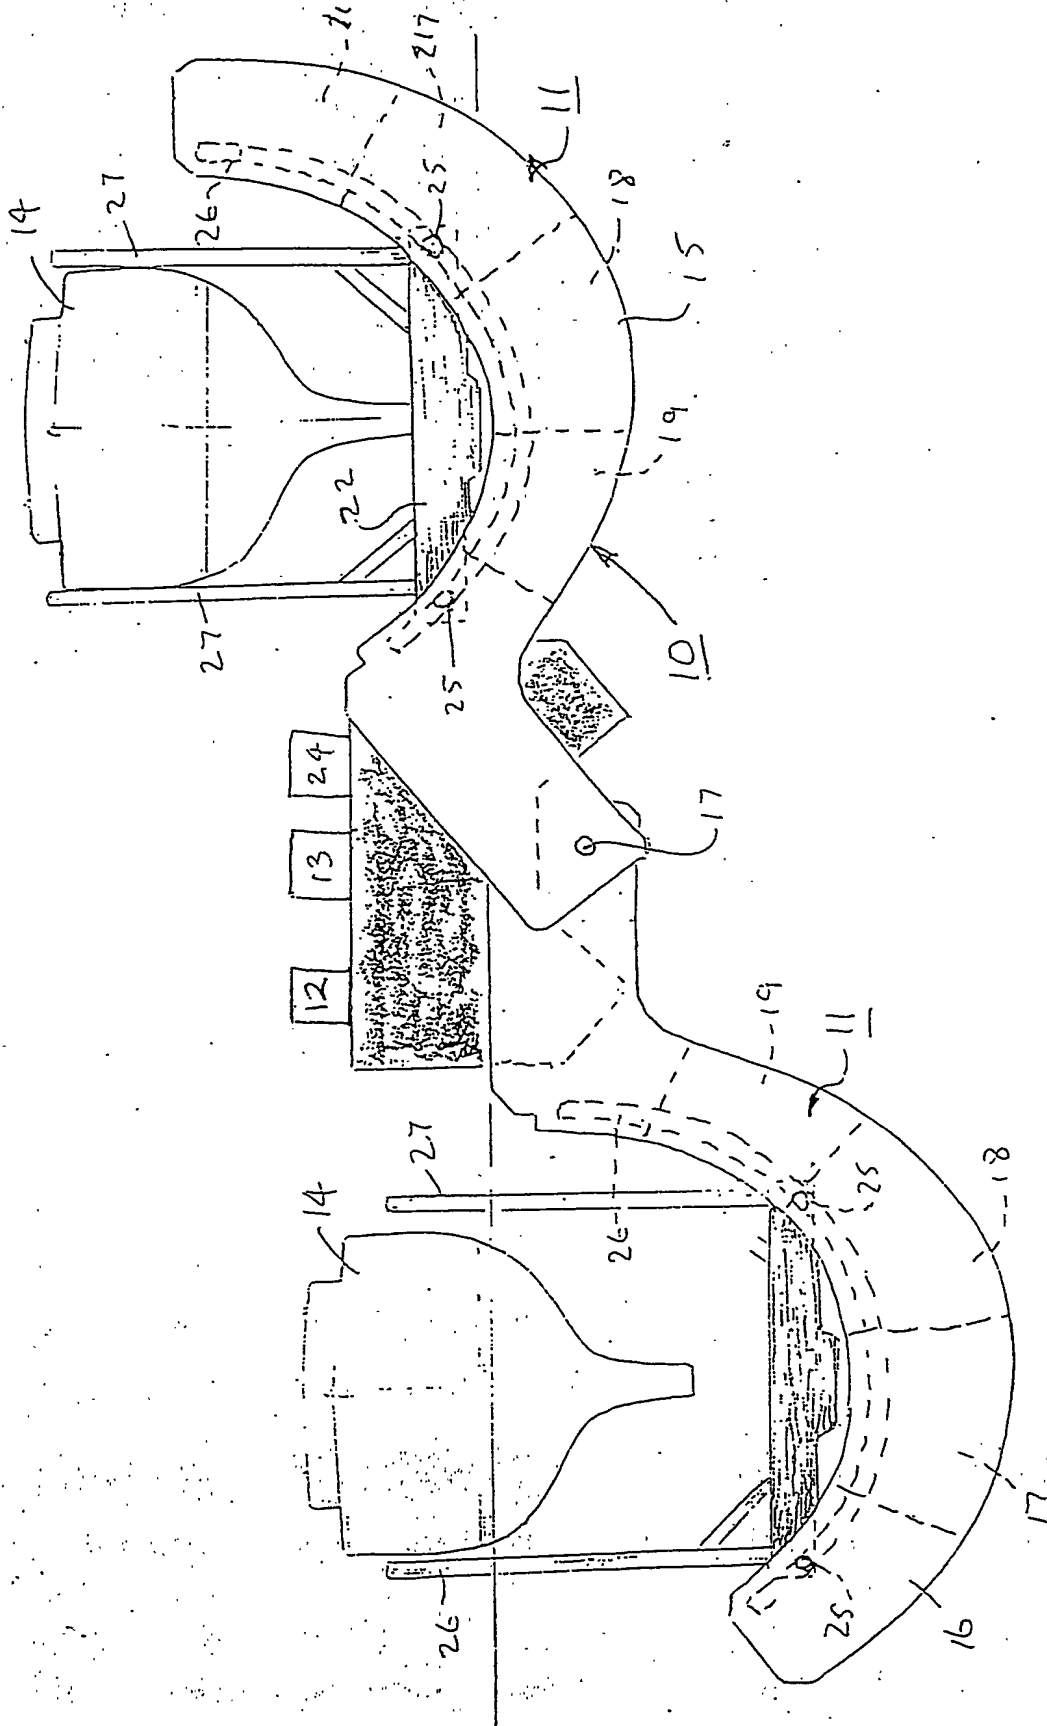


FIG 1

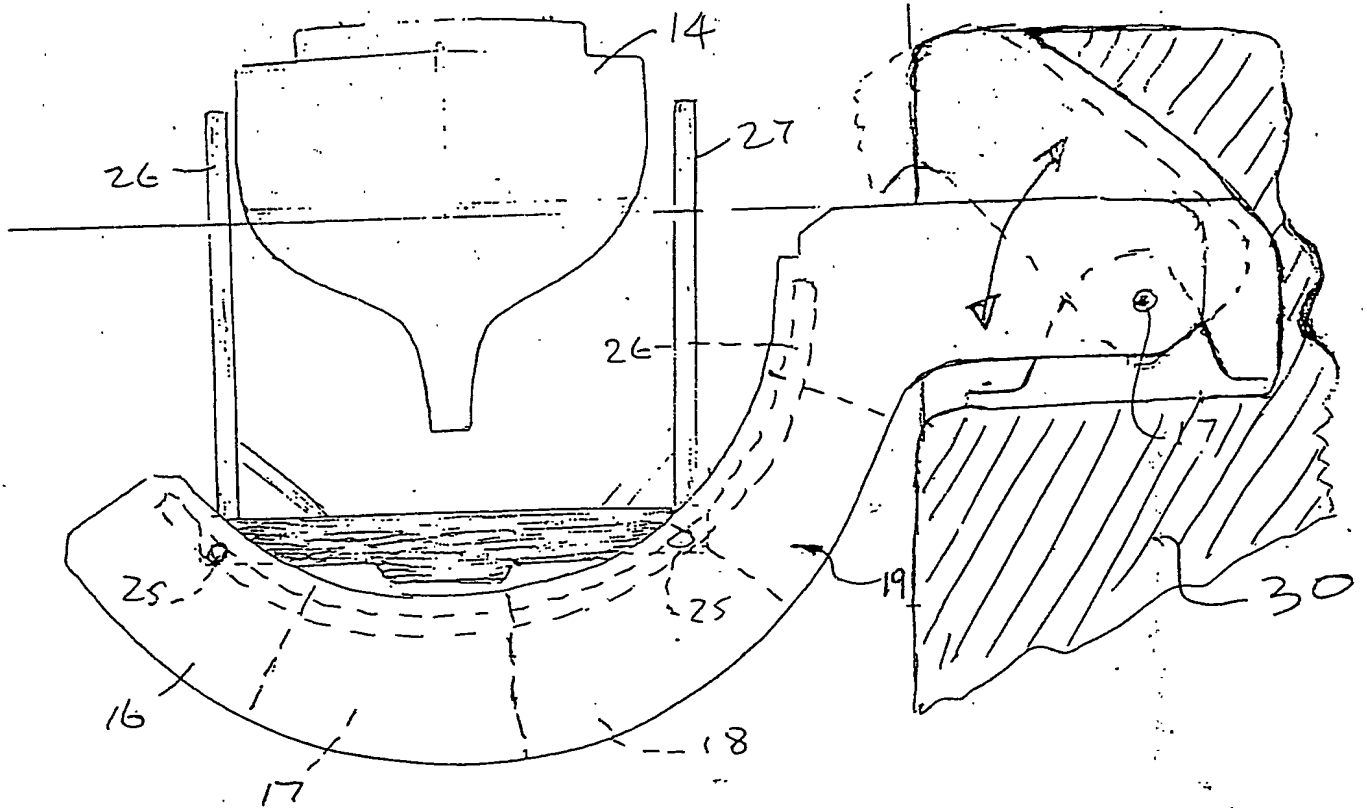


FIG 2

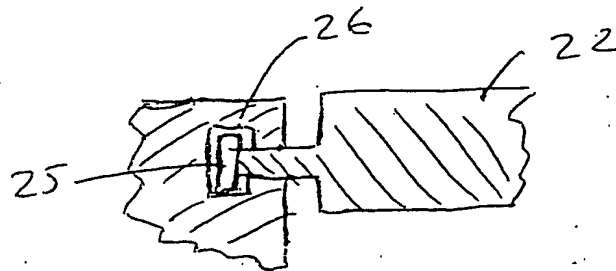


FIG 3

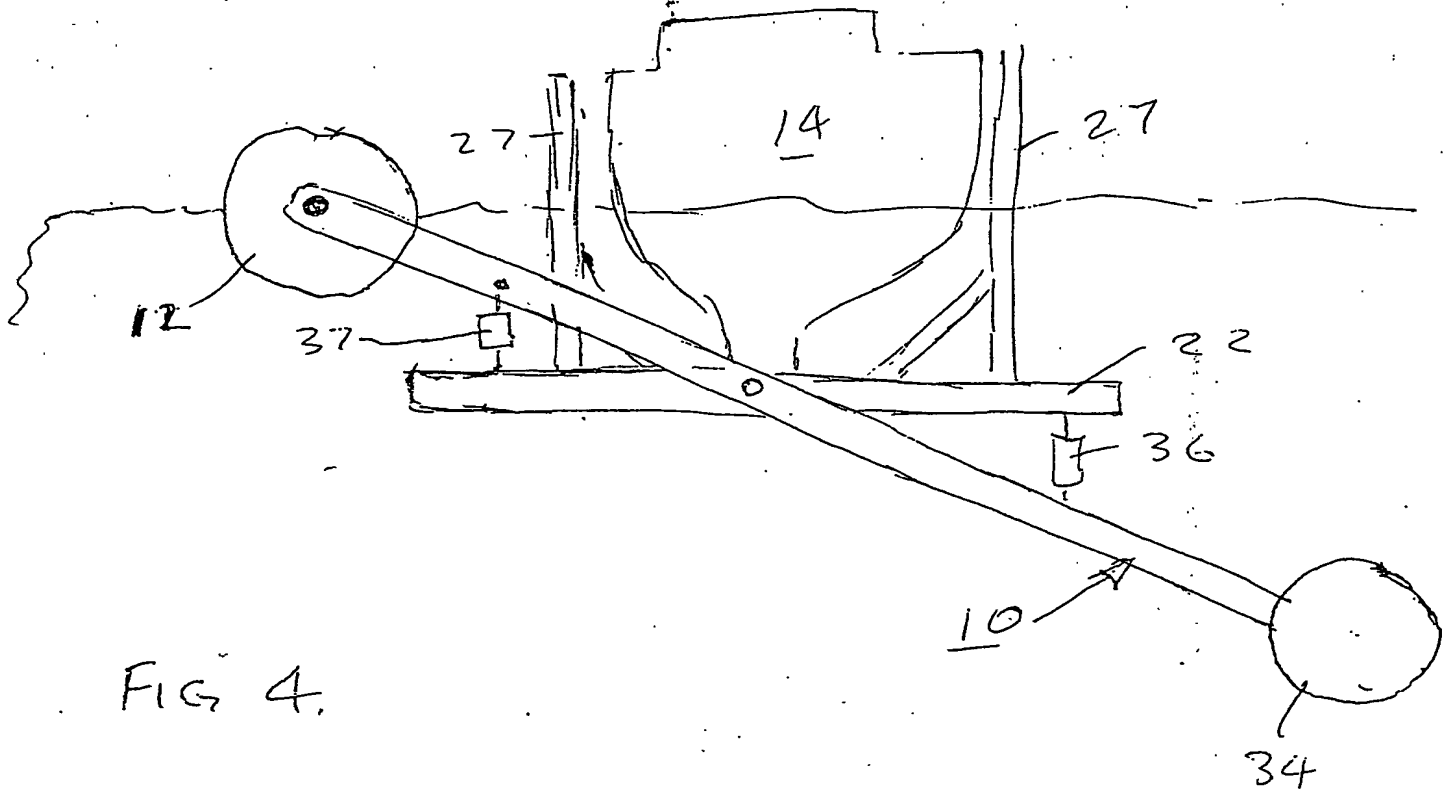


FIG 4.

PCT/GB2004/003455



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.